




RT1095A

10.95" Rugged Tablet

Product Feature




Sealing



Drop Test



Certified



AI Computing



Hot-Swap Battery




Barcode Scanner

In the Field, In the Vehicle, In the Office

- 10.95" Rugged Tablet
- MIL-STD-810H tested, 4ft. / 1.2m drop proof, IP67, 1-meter tumble test.
- Powered by MediaTek MT8791 Octa-core processor with Android 15 OS.
- Sunlight readable 750 nits high brightness IPS display with Corning® Gorilla® Glass 3.
- Hot-swappable 10,000mAh (38.5Wh) high-capacity battery pack.
- Built-in 2.8 TOPS APU for AI computing applications.
- Support Wi-Fi 6, Bluetooth® 5.2, and global 4G LTE mobile broadband.
- Integrated NFC and PSAM slot for secure identification.
- 13MP Auto-Focus rear camera and 5MP front camera.
- Support GPS, GLONASS, BEIDOU, and GALILEO navigation.
- Optional 1D/2D barcode reader for data acquisition.



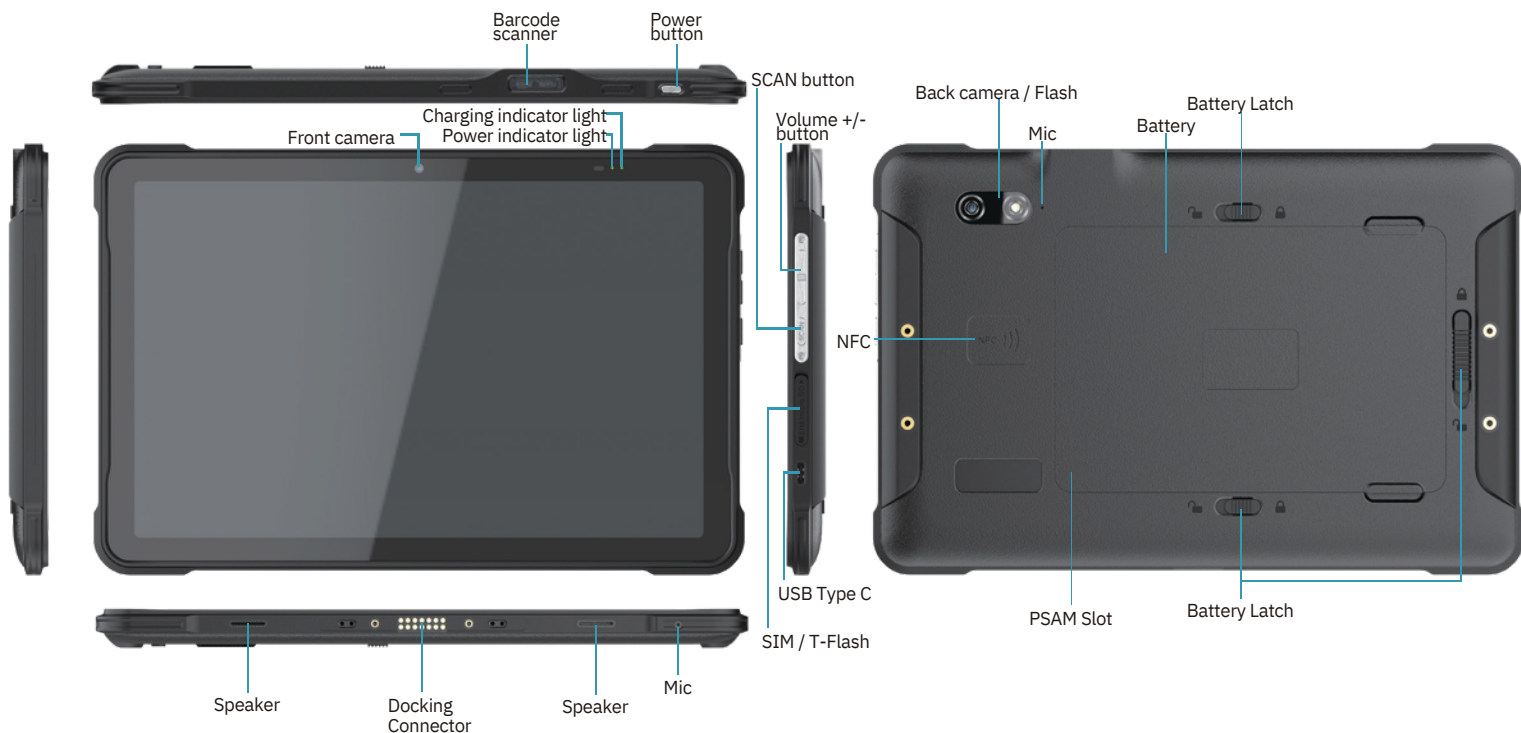

Specifications

CPU	MTK8791 : 2 X A78 @2.4GHZ + 6 X A55@2.0HZ
OS	Android 15
Display	10.95", 16:10 ratio 1200x1920 IPS 750 nits Sunlight readable
APU	2.8 TOPS
Memory	6GB+128GB, LPDDR4x (8GB+256GB Optional)
WWAN	- Europe/Asia Version (Including Mainland China): GSM: B2/3/5/8 (without diversity), WCDMA: B1/2/4/5/8 (without diversity), CDMA 1X EVDO BC0, BC1, TDD LTE: B34/38/39/40/41(2496-2690)/42/43, FDD LTE: B1/2/3/4/5/7/8/20/28full/66, 5G: SA N1/3/5/7/8/20/28/38/41(PC2)/66/77/78/79 (5G upon request) - US Version: GSM: B2/3/5/8 (without diversity), WCDMA: B1/2/4/5 (without diversity), CDMA 1X EVDO BC0/BC1, TDD LTE: B38/41 (2496-2690 MHz), FDD LTE: B1/2/4/5/7/12/13/17/25/26/66/71, 5G: N2/5/7/12/13/25/26/29/38/41/48/66/70/71/77/78, (5G upon request)
Dimension	266.5*175*13.6 mm
Weight	825g±5g
WLAN	Wi-Fi 6 (802.11ax) Bluetooth® 5.2
Touch Screen	Corning® Gorilla® Glass 3, 10-point multi-touch, AF included
Battery	- Battery : 3.85V, 10000mAh / 38.5Wh Hot swappable - Backup battery : 3.85V, 78mAh / 0.3Wh - Support up to 27W charging
Interface	- USB 3.0 Type C x 1 - SIM Slot (Dual SIM support or SIM1 + microSD) - Docking connector - PSAM Slot

Physical buttons	- Power - Vol + - Vol - - Barcode scan button (Programmable)
GPS	GPS / GLONASS / BEIDOU / GALILEO
LED INDICATORS	- Power LED - Battery LED
NFC	ISO/IEC 14443 A / 14443 B / 15693 Mifare, FeliCa
Camera	5MP front camera, 13MP rear camera, Auto Focus, Flash
Audio	2 x 2W Speaker 2 x Digital microphone
Durability	- MIL-STD-810H (Multiple 4' / 1.2m Drop) - IP67 1m tumble test - Optional Glass screen protector - Operating temp. : -20°C ~60°C - Storage temp. : -20°C ~70°C
Scanner	Honeywell: N6703 / Newland: CM60

Contact Info:

Jay Lorenz

Director of Display Solutions

678.492.0019

CONTEC

Let's connect!

android

