




RT1095A

10.95" Rugged Tablet

Product Feature




Sealing



Drop Test



Certified



AI Computing



Hot-Swap Battery




Barcode Scanner

In the Field, In the Vehicle, In the Office

- 10.95" Rugged Tablet
- MIL-STD-810H tested, 4ft. / 1.2m drop proof, IP67, 1-meter tumble test.
- Powered by MediaTek MT8791 Octa-core processor with Android 15 OS.
- Sunlight readable 750 nits high brightness IPS display with Corning® Gorilla® Glass 3.
- Hot-swappable 10,000mAh (38.5Wh) high-capacity battery pack.
- Built-in 2.8 TOPS APU for AI computing applications.
- Support Wi-Fi 6, Bluetooth® 5.2, and global 4G LTE mobile broadband.
- Integrated NFC and PSAM slot for secure identification.
- 13MP Auto-Focus rear camera and 5MP front camera.
- Support GPS, GLONASS, BEIDOU, and GALILEO navigation.
- Optional 1D/2D barcode reader for data acquisition.



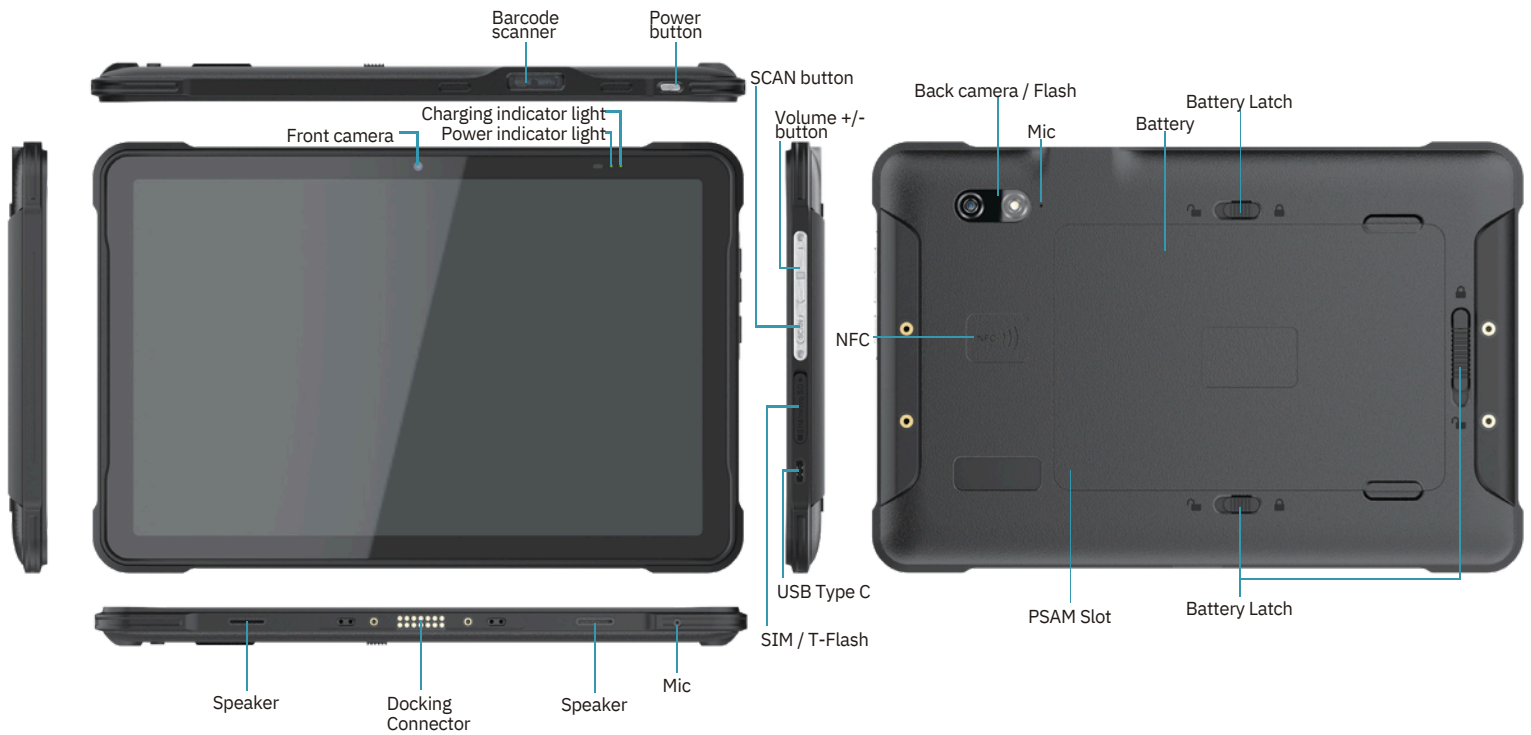

Specifications

| | |
|--------------|---|
| CPU | <ul style="list-style-type: none"> • MTK8791 : 2 X A78 @2.4GHZ + 6 X A55@2.0HZ |
| OS | <ul style="list-style-type: none"> • Android 15 |
| Display | <ul style="list-style-type: none"> • 10.95", 16:10 ratio 1200x1920 IPS 750 nits Sunlight readable |
| APU | <ul style="list-style-type: none"> • 2.8 TOPS |
| Memory | <ul style="list-style-type: none"> • 6GB+128GB, LPDDR4x (8GB+256GB Optional) |
| WWAN | <ul style="list-style-type: none"> • Europe/Asia Version (Including Mainland China): GSM: B2/3/5/8 (without diversity), WCDMA: B1/2/4/5/8 (without diversity), CDMA 1X EVDO BCO, BC1, TDD LTE: B34/38/39/40/41(2496-2690)/42/43, FDD LTE: B1/2/3/4/5/7/8/20/28full/66, 5G: SA N1/3/5/7/8/20/28/38/41(PC2)/66/77/78/79 (5G upon request) • US Version: GSM: B2/3/5/8 (without diversity), WCDMA: B1/2/4/5 (without diversity), CDMA 1X EVDO BCO/BC1, TDD LTE: B38/41 (2496-2690 MHz), FDD LTE: B1/2/4/5/7/12/13/17/25/26/66/71, 5G: N2/5/7/12/13/25/26/29/38/41/48/66/70/71/77/78, (5G upon request) |
| Dimension | <ul style="list-style-type: none"> • 266.5*175*13.6 mm |
| Weight | <ul style="list-style-type: none"> • 825g±5g |
| WLAN | <ul style="list-style-type: none"> • Wi-Fi 6 (802.11ax) Bluetooth® 5.2 |
| Touch Screen | <ul style="list-style-type: none"> • Corning® Gorilla® Glass 3, 10-point multi-touch, AF included |
| Battery | <ul style="list-style-type: none"> • Battery : 3.85V, 10000mAh / 38.5Wh Hot swappable • Backup battery : 3.85V, 78mAh / 0.3Wh • Support up to 27W charging |
| Interface | <ul style="list-style-type: none"> • USB 3.0 Type C x 1 • SIM Slot (Dual SIM support or SIM1 + microSD) • Docking connector • PSAM Slot |

| | |
|------------------|---|
| Physical buttons | <ul style="list-style-type: none"> • Power • Vol + • Vol - • Barcode scan button (Programmable) |
| GPS | <ul style="list-style-type: none"> • GPS / GLONASS / BEIDOU / GALILEO |
| LED INDICATORS | <ul style="list-style-type: none"> • Power LED • Battery LED |
| NFC | <ul style="list-style-type: none"> • ISO/IEC 14443 A / 14443 B / 15693 Mifare, FeliCa |
| Camera | <ul style="list-style-type: none"> • 5MP front camera, 13MP rear camera, Auto Focus, Flash |
| Audio | <ul style="list-style-type: none"> • 2 x 2W Speaker • 2 x Digital microphone |
| Durability | <ul style="list-style-type: none"> • MIL-STD-810H (Multiple 4' / 1.2m Drop) • IP67 • 1m tumble test • Optional Glass screen protector • Operating temp. : -20°C ~60°C • Storage temp. : -20°C ~70°C |
| Scanner | <ul style="list-style-type: none"> • Honeywell: N6703 / Newland: CM60 |

Contact Info:

Jay Lorenz

Director of Display Solutions

678.492.0019

CONTEC

Let's connect!

android 

